


## 燃えるごみ(焼却ごみ)の分析結果

ごみ質分析は、法律で義務づけられているだけでなく、適正なごみの焼却を行う上で大変重要です。きれいセンターでは、年4回ごみ質分析を実施していますが、得られたデータを基にごみ処理の計画や施設管理等に利用しています。

### ■ ごみ質の種類組成測定結果(年4回の測定データ平均値)

| 年度 | 紙・布類   | ビニール・合成樹脂・ゴム・皮革類 | 木・竹・わら類 | ちゅうかい類 | 不燃物類  | その他   |
|----|--------|------------------|---------|--------|-------|-------|
| 8  | 53.15% | 17.50%           | 4.48%   | 21.70% | 1.22% | 1.95% |
| 9  | 53.43% | 21.40%           | 5.60%   | 15.05% | 3.15% | 1.37% |
| 10 | 61.23% | 18.44%           | 3.44%   | 10.35% | 3.62% | 2.92% |
| 11 | 46.45% | 31.70%           | 3.93%   | 15.45% | 2.47% | 0.00% |
| 12 | 57.20% | 18.25%           | 3.05%   | 14.75% | 2.03% | 4.72% |
| 13 | 59.98% | 20.35%           | 4.37%   | 14.15% | 0.73% | 0.42% |
| 14 | 54.68% | 13.47%           | 26.02%  | 4.53%  | 0.25% | 1.05% |
| 15 | 62.09% | 9.23%            | 16.33%  | 7.80%  | 2.95% | 1.60% |
| 16 | 76.75% | 8.72%            | 7.85%   | 5.15%  | 0.80% | 0.73% |
| 17 | 61.50% | 20.73%           | 7.70%   | 8.90%  | 0.35% | 0.82% |
| 18 | 67.20% | 23.95%           | 4.70%   | 3.58%  | 0.27% | 0.30% |
| 19 | 57.12% | 18.10%           | 9.95%   | 12.60% | 1.03% | 1.20% |
| 20 | 55.82% | 20.80%           | 5.20%   | 15.92% | 0.88% | 1.38% |
| 21 | 61.70% | 22.20%           | 4.80%   | 9.65%  | 0.55% | 1.10% |
| 22 | 55.82% | 20.80%           | 5.20%   | 15.92% | 0.88% | 1.38% |
| 23 | 51.73% | 20.18%           | 4.92%   | 16.05% | 3.42% | 3.70% |
| 24 | 52.73% | 20.42%           | 6.65%   | 15.05% | 2.00% | 3.15% |
| 25 | 63.03% | 14.32%           | 7.25%   | 8.38%  | 3.50% | 3.52% |
| 26 | 67.03% | 10.72%           | 5.88%   | 12.42% | 1.50% | 2.45% |
| 27 | 65.30% | 21.50%           | 1.98%   | 9.40%  | 0.35% | 1.47% |
| 28 | 62.45% | 18.45%           | 6.85%   | 7.53%  | 2.12% | 2.60% |
| 29 | 74.18% | 16.07%           | 2.20%   | 4.10%  | 1.75% | 1.70% |
| 30 | 57.95% | 22.58%           | 5.50%   | 9.35%  | 0.87% | 3.75% |

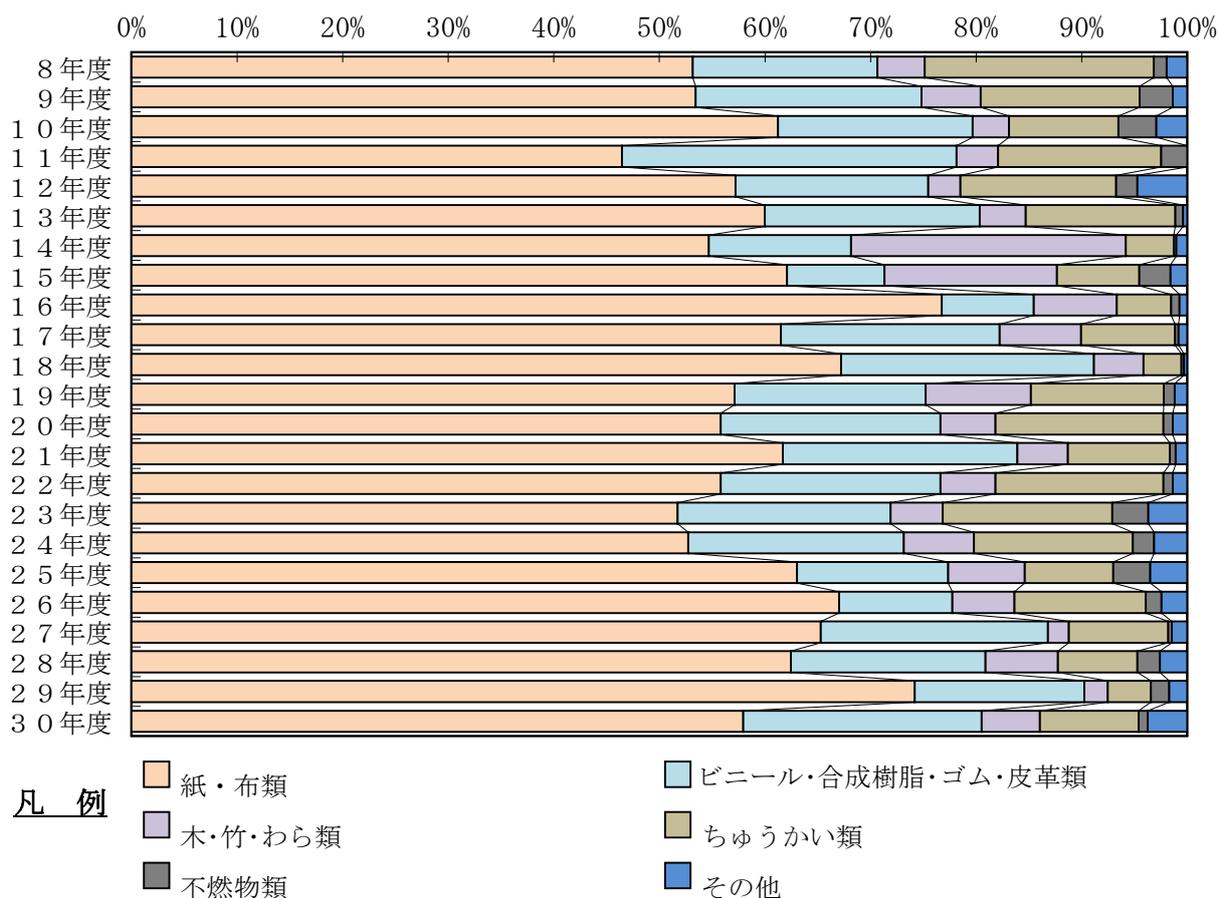

■ 三成分測定結果(年4回の測定データ平均値)

ごみを分別、乾燥、焼却処理等の方法により、ごみの水分・灰分・可燃分を測定します。  
 これまでの測定データは、次のとおりです。

| 年度 | 水分     | 灰分    | 可燃分    |
|----|--------|-------|--------|
| 8  | 56.20% | 4.45% | 39.35% |
| 9  | 47.67% | 7.23% | 45.10% |
| 10 | 47.10% | 6.52% | 46.38% |
| 11 | 50.99% | 4.18% | 44.83% |
| 12 | 46.35% | 5.35% | 48.30% |
| 13 | 44.72% | 6.83% | 48.45% |
| 14 | 50.07% | 4.53% | 45.40% |
| 15 | 49.35% | 6.23% | 44.42% |
| 16 | 45.15% | 5.78% | 49.07% |
| 17 | 50.55% | 3.90% | 45.55% |
| 18 | 45.53% | 5.02% | 49.45% |
| 19 | 48.38% | 5.62% | 46.00% |
| 20 | 58.28% | 2.72% | 39.00% |
| 21 | 50.70% | 5.00% | 44.30% |
| 22 | 53.05% | 4.20% | 42.75% |
| 23 | 44.08% | 9.52% | 46.40% |
| 24 | 51.50% | 7.58% | 40.92% |
| 25 | 42.72% | 9.95% | 47.33% |
| 26 | 46.73% | 8.35% | 44.92% |
| 27 | 46.52% | 4.78% | 48.70% |
| 28 | 41.87% | 9.35% | 48.78% |
| 29 | 40.93% | 9.07% | 50.00% |
| 30 | 40.70% | 5.12% | 54.18% |

